


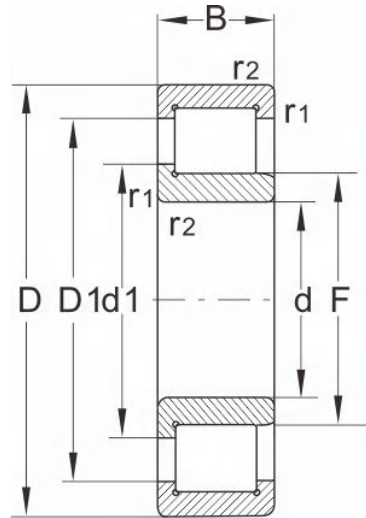

NJ23..VH

| 型号       | 外形尺寸(mm) |    |    |              |              | 基本额定载荷(kN) |      | 轴承尺寸  |       |      |      |     | 极限速度 |      | 重量(kg) |
|----------|----------|----|----|--------------|--------------|------------|------|-------|-------|------|------|-----|------|------|--------|
|          | d        | D  | B  | r1,r2<br>Min | r3,r4<br>min | 动负荷        | 静负荷  | E     | F     | d1   | D1   | S   | 脂润滑  | 油润滑  |        |
| NC2904V  | 20       | 37 | 11 | 0.3          | 0.3          | 16         | 18.5 | --    | --    | 26.3 | 30.3 | --  | 4800 | 9000 | 0.06   |
| NCF2904V | 20       | 37 | 11 | 0.3          | 0.3          | 16         | 18.5 | 32.3  | --    | 26.3 | 30.3 | 0.5 | 4800 | 9000 | 0.06   |
| NC3004V  | 20       | 42 | 16 | 0.6          | 0.3          | 33         | 39.7 | --    | --    | 27.5 | 34.5 | --  | 4500 | 8400 | 0.12   |
| NCF3004V | 20       | 42 | 16 | 0.6          | 0.3          | 33         | 39.7 | 37.5  | --    | 27.5 | 34.5 | 0.5 | 4500 | 8400 | 0.11   |
| NC2905V  | 25       | 42 | 11 | 0.3          | 0.3          | 18         | 22.5 | --    | --    | 31.4 | 35.4 | --  | 4000 | 7500 | 0.07   |
| NCF2905V | 25       | 42 | 11 | 0.3          | 0.3          | 18         | 22.5 | 37.45 | --    | 31.4 | 35.4 | 0.5 | 4000 | 7500 | 0.06   |
| NC3005V  | 25       | 47 | 16 | 0.6          | 0.3          | 37.4       | 46.9 | --    | --    | 36.3 | 39   | --  | 3600 | 7000 | 0.13   |
| NCF3005V | 25       | 47 | 16 | 0.6          | 0.3          | 37.4       | 46.9 | 42.7  | --    | 36.3 | 39   | 0.5 | 3600 | 7000 | 0.12   |
| NCF2205V | 25       | 52 | 18 | 1            | 0.6          | 46         | 45   | 46.5  | --    | 35   | 42   | 1   | --   | --   | 0.18   |
| NJ2305VH | 25       | 62 | 24 | 1.1          | --           | 68.2       | 82.8 | --    | 31.71 | 36.3 | 48.2 | 1.7 | 3000 | 5300 | 0.4    |
| NC2906V  | 30       | 47 | 11 | 0.3          | 0.3          | 19.8       | 26   | --    | --    | 36.5 | 40.5 | --  | 3600 | 6700 | 0.08   |
| NCF2906V | 30       | 47 | 11 | 0.3          | 0.3          | 19.8       | 26   | 42.5  | --    | 36.5 | 40.5 | 0.5 | 3600 | 6700 | 0.07   |
| NC3006V  | 30       | 55 | 19 | 1            | 0.4          | 49         | 63   | --    | --    | 38.4 | 46.8 | --  | 3200 | 5600 | 0.22   |
| NCF3006V | 30       | 55 | 19 | 1            | 0.4          | 49         | 63   | 49.6  | --    | 38.4 | 46.8 | 0.8 | 3200 | 5600 | 0.2    |
| NCF2206V | 30       | 62 | 20 | 1            | 0.6          | 63         | 65   | 55    | 38.34 | 42   | 50.5 | 1   | --   | --   | 0.3    |
| NJ2306VH | 30       | 72 | 27 | 1            | --           | 84         | 102  | --    | --    | 43.3 | 56.5 | 1.8 | 1900 | 4000 | 0.56   |
| NC2907V  | 35       | 55 | 13 | 0.6          | 0.3          | 31         | 40.5 | --    | --    | 42.4 | 47.4 | --  | 3000 | 5600 | 0.14   |
| NCF2907V | 35       | 55 | 13 | 0.6          | 0.3          | 31         | 40.5 | 49.9  | --    | 42.4 | 47.4 | 0.5 | 3000 | 5600 | 0.12   |
| NC3007V  | 35       | 62 | 20 | 1            | 0.4          | 55         | 71.5 | --    | --    | 43.6 | 52.6 | --  | 2800 | 5300 | 0.27   |
| NCF3007V | 35       | 62 | 20 | 1            | 0.4          | 55         | 71.5 | 55.52 | --    | 43.6 | 52.6 | 1   | 2800 | 5300 | 0.25   |

# 单列满装圆柱滚子轴承

|          |    |     |    |     |     |      |      |       |       |      |      |     |      |      |      |
|----------|----|-----|----|-----|-----|------|------|-------|-------|------|------|-----|------|------|------|
| NCF2207V | 35 | 72  | 23 | 1.1 | 0.6 | 79   | 79   | 64    | --    | 47   | 59   | 1   | --   | --   | 0.44 |
| NJ2307VH | 35 | 80  | 31 | 1.5 | --  | 108  | 124  | --    | 44.74 | 50.3 | 65.8 | 2   | 1600 | 3400 | 0.73 |
| NC2908V  | 40 | 62  | 14 | 0.6 | 0.3 | 34   | 46.5 | --    | --    | 48.3 | 53.9 | --  | 2500 | 5000 | 0.16 |
| NCF2908V | 40 | 62  | 14 | 0.6 | 0.3 | 34   | 46.5 | 56.6  | --    | 48.3 | 53.9 | 0.5 | 2600 | 5000 | 0.15 |
| NC3008V  | 40 | 68  | 21 | 1   | 0.4 | 66   | 87.4 | --    | --    | 49.1 | 58.7 | --  | 2400 | 4500 | 0.32 |
| NCF3008V | 40 | 68  | 21 | 1   | 0.4 | 65   | 86   | 61.8  | --    | 49   | 58.6 | 1   | 2400 | 4500 | 0.3  |
| NCF2208V | 40 | 80  | 23 | 1.1 | 1.1 | 87   | 83   | 71    | --    | 54   | 66   | 1   | --   | --   | 0.55 |
| NJ2308VH | 40 | 90  | 33 | 1.5 | --  | 145  | 184  | --    | 51.1  | 57.5 | 76   | 2.4 | 1400 | 3000 | 1    |
| NC2909V  | 45 | 68  | 14 | 0.6 | 0.3 | 37   | 52   | --    | --    | 53.6 | 59.2 | --  | 2200 | 4500 | 0.2  |
| NCF2909V | 45 | 68  | 14 | 0.6 | 0.3 | 37   | 52   | 61.9  | --    | 53.6 | 59.2 | 0.5 | 2200 | 4500 | 0.18 |
| NC3009V  | 45 | 75  | 23 | 1   | 0.4 | 81   | 110  | --    | --    | 55   | 65   | --  | 2000 | 4300 | 0.42 |
| NCF3009V | 45 | 75  | 23 | 1   | 0.4 | 81   | 110  | 68.5  | --    | 55   | 65   | 1   | 2000 | 4300 | 0.4  |
| NCF2209V | 45 | 85  | 23 | 1.1 | 1.1 | 90   | 99   | 74.5  | --    | 57.5 | 69.5 | 1   | --   | --   | 0.59 |
| NJ2309VH | 45 | 100 | 36 | 1.5 | --  | 170  | 220  | --    | 56.13 | 62.5 | 81.8 | 2.4 | 1300 | 2800 | 1.35 |
| NC2909V  | 50 | 72  | 14 | 0.6 | 0.3 | 39   | 56   | --    | --    | 58.7 | 64.4 | --  | 1900 | 4000 | 0.21 |
| NCF2909V | 50 | 72  | 14 | 0.6 | 0.3 | 39   | 56   | 67.1  | --    | 58.7 | 64.4 | 0.5 | 1900 | 4000 | 0.18 |
| NC3010V  | 50 | 80  | 23 | 1   | 0.4 | 85   | 120  | --    | --    | 58   | 68.8 | --  | 1900 | 4000 | 0.45 |
| NCF3010V | 50 | 80  | 23 | 1   | 0.4 | 85   | 120  | 72.33 | --    | 58   | 68.8 | 1   | 1900 | 4000 | 0.43 |
| NCF2210V | 50 | 90  | 23 | 1.1 | 1.1 | 97   | 113  | 81.5  | --    | 64.5 | 76.5 | 1   | --   | --   | 0.64 |
| NJ2310VH | 50 | 110 | 40 | 2   | --  | 198  | 250  | --    | 60.7  | 68.3 | 90.3 | 2.6 | 1100 | 2400 | 1.85 |
| NC2911V  | 55 | 80  | 16 | 1   | 0.6 | 42   | 60   | --    | --    | 64.2 | 70.2 | --  | 1800 | 3800 | 0.3  |
| NCF2911V | 55 | 80  | 16 | 1   | 0.6 | 42   | 60   | 73.2  | --    | 64.2 | 70.2 | 0.5 | 1800 | 3800 | 0.27 |
| NC3011V  | 55 | 90  | 26 | 1.1 | 0.6 | 105  | 152  | --    | --    | 67.5 | 79.5 | --  | 1600 | 3400 | 0.66 |
| NCF3011V | 55 | 90  | 26 | 1.1 | 0.6 | 105  | 152  | 83.7  | --    | 67.5 | 79.5 | 1.2 | 1600 | 3400 | 0.63 |
| NCF2211V | 55 | 100 | 25 | 1.5 | 1.1 | 125  | 150  | 89    | --    | 70   | 83.5 | 1.5 | --   | --   | 0.87 |
| NJ2311VH | 55 | 120 | 43 | 2   | --  | 230  | 260  | --    | 67.1  | 75.5 | 98.6 | 2.6 | 1000 | 2200 | 2.3  |
| NC2912V  | 60 | 85  | 16 | 1   | 0.6 | 52   | 78   | --    | --    | 69.5 | 76.1 | --  | 1600 | 3400 | 0.3  |
| NCF2912V | 60 | 85  | 16 | 1   | 0.6 | 52   | 78   | 79.3  | --    | 69.5 | 76.1 | 0.5 | 1600 | 3400 | 0.28 |
| NC3012V  | 60 | 95  | 26 | 1.1 | 0.6 | 110  | 160  | --    | --    | 70.9 | 82.9 | --  | 1600 | 3200 | 0.71 |
| NCF3012V | 60 | 95  | 26 | 1.1 | 0.6 | 110  | 160  | 86.9  | --    | 70.9 | 82.9 | 1.2 | 1600 | 3200 | 0.68 |
| NCF2212V | 60 | 110 | 28 | 1.5 | 1.5 | 152  | 180  | 99    | --    | 77   | 93   | 1.5 | --   | --   | 1.18 |
| NJ2312VH | 60 | 130 | 46 | 2.1 | --  | 260  | 352  | --    | 73.68 | 82.1 | 106  | 3   | 950  | 2000 | 2.83 |
| NC2913V  | 65 | 90  | 16 | 1   | 0.6 | 53.5 | 80   | --    | --    | 7.37 | 80.3 | --  | 1600 | 3400 | 0.33 |
| NCF2913V | 65 | 90  | 16 | 1   | 0.6 | 53.5 | 80   | 83.5  | --    | 73.7 | 80.3 | 0.5 | 1600 | 3400 | 0.3  |
| NC3013V  | 65 | 100 | 26 | 1.1 | 0.6 | 117  | 175  | --    | --    | 77.1 | 97.1 | --  | 1400 | 3000 | 0.75 |
| NCF3013V | 65 | 100 | 26 | 1.1 | 0.6 | 117  | 175  | 93.1  | --    | 77.1 | 87.1 | 1.2 | 1400 | 3000 | 0.72 |
| NCF2213V | 65 | 120 | 31 | 1.5 | 1.5 | 178  | 214  | 106   | --    | 82.5 | 100  | 1.5 | --   | --   | 1.57 |
| NJ2313VH | 65 | 140 | 48 | 2.1 | --  | 302  | 358  | --    | 80.71 | 89.4 | 117  | 3   | 900  | 1900 | 3.48 |

### 单列满装圆柱滚子轴承

|          |     |     |    |     |     |      |     |       |        |       |       |      |      |      |      |
|----------|-----|-----|----|-----|-----|------|-----|-------|--------|-------|-------|------|------|------|------|
| NC2914V  | 70  | 100 | 19 | 1   | 0.6 | 77   | 118 | --    | --     | 80.5  | 88.5  | --   | 1400 | 3000 | 0.52 |
| NCF2914V | 70  | 100 | 19 | 1   | 0.6 | 77   | 118 | 92.5  | --     | 80.5  | 88.5  | 0.75 | 1400 | 3000 | 0.48 |
| NC3014V  | 70  | 110 | 30 | 1.1 | 0.6 | 145  | 215 | --    | --     | 82.6  | 97.2  | --   | 1300 | 2800 | 1.1  |
| NCF3014V | 70  | 110 | 30 | 1.1 | 0.6 | 145  | 215 | 102.1 | --     | 82.6  | 97.2  | 1.5  | 1300 | 2800 | 1.05 |
| NCF2214V | 70  | 120 | 31 | 1.5 | 1.5 | 184  | 227 | 111   | --     | 87    | 105   | 1.5  | --   | --   | 1.66 |
| NJ2314VH | 70  | 150 | 51 | 2.1 | --  | 335  | 455 | --    | 84.22  | 93.8  | 121   | 3    | 850  | 1800 | 4.4  |
| NC2915V  | 75  | 105 | 19 | 1   | 0.6 | 79.5 | 124 | --    | --     | 85.6  | 93.6  | --   | 1300 | 2800 | 0.55 |
| NCF2915V | 75  | 105 | 19 | 1   | 0.6 | 79.5 | 124 | 97.6  | --     | 85.6  | 93.6  | 0.75 | 1300 | 2800 | 0.5  |
| NC3015V  | 75  | 115 | 30 | 1.1 | 0.6 | 154  | 224 | --    | --     | 87    | 102   | --   | 1200 | 2600 | 1.15 |
| NCF3015V | 75  | 115 | 30 | 1.1 | 0.6 | 154  | 224 | 106.5 | --     | 87    | 102   | 1.5  | 1200 | 2600 | 1.1  |
| NCF2215V | 75  | 130 | 31 | 1.5 | 1.5 | 190  | 241 | 116   | --     | 91.5  | 110   | 1.5  | --   | --   | 1.7  |
| NJ2315VH | 75  | 160 | 55 | 2.1 | --  | 390  | 550 | --    | 91.25  | 100.8 | 132.5 | 3    | 750  | 1600 | 5.18 |
| NC2916V  | 80  | 110 | 19 | 1   | 0.6 | 81   | 128 | --    | --     | 90.7  | 98.7  | --   | 1200 | 2600 | 0.57 |
| NCF2916V | 80  | 110 | 19 | 1   | 0.6 | 81   | 128 | 102.7 | --     | 90.4  | 98.7  | 0.75 | 1200 | 2600 | 0.53 |
| NC3016V  | 80  | 125 | 34 | 1.1 | 0.6 | 194  | 285 | --    | --     | 94.8  | 112   | --   | 1100 | 2400 | 1.56 |
| NCF3016V | 80  | 125 | 34 | 1.1 | 0.6 | 194  | 285 | 117.2 | --     | 94.8  | 112   | 1.8  | 1100 | 2400 | 1.5  |
| NCF2216V | 80  | 140 | 33 | 2   | 2   | 226  | 285 | 126   | --     | 98.5  | 119   | 1.5  | --   | --   | 2.15 |
| NJ2316VH | 80  | 170 | 58 | 2.1 | --  | 455  | 550 | --    | 98.3   | 109   | 141   | 4    | 700  | 1500 | 6.4  |
| NC2917V  | 85  | 120 | 22 | 1.1 | 1   | 105  | 168 | --    | --     | 99.1  | 109   | --   | 1100 | 2400 | 0.79 |
| NCF2917V | 85  | 120 | 22 | 1.1 | 1   | 105  | 168 | 112.5 | --     | 99.1  | 109   | 0.75 | 1100 | 2400 | 0.78 |
| NC3017V  | 85  | 130 | 34 | 1.1 | 0.6 | 195  | 295 | --    | --     | 99.2  | 116   | --   | 1100 | 2400 | 1.6  |
| NCF3017V | 85  | 130 | 34 | 1.1 | 0.6 | 195  | 295 | 121.6 | --     | 99.2  | 116   | 1.8  | 1100 | 2200 | 1.55 |
| NCF2217V | 85  | 150 | 36 | 2   | 2   | 255  | 325 | 133   | --     | 104.5 | 126   | 1.5  | --   | --   | 2.74 |
| NJ2317VH | 85  | 180 | 60 | 3   | --  | 482  | 695 | --    | 107.03 | 117.4 | 151.5 | 4    | 670  | 1400 | 7.3  |
| NC2918V  | 90  | 125 | 22 | 1.1 | 1   | 105  | 172 | --    | --     | 102   | 111   | --   | 1100 | 2400 | 0.9  |
| NCF2918V | 90  | 125 | 22 | 1.1 | 1   | 105  | 172 | 115.6 | --     | 102   | 111   | 0.75 | 1100 | 2400 | 0.82 |
| NC3018V  | 90  | 140 | 37 | 1.5 | 1   | 227  | 348 | --    | --     | 106.2 | 125   | --   | 1000 | 2200 | 2.12 |
| NCF3018V | 90  | 140 | 37 | 1.5 | 1   | 227  | 348 | 130.3 | --     | 106.2 | 125   | 2    | 1000 | 2200 | 2.05 |
| NCF2218V | 90  | 160 | 40 | 2   | 2   | 290  | 370 | 140.5 | --     | 110   | 133   | 2.5  | --   | --   | 3.48 |
| NJ2318VH | 90  | 190 | 64 | 3   | --  | 520  | 790 | --    | 108.8  | 121   | 156   | 4    | 670  | 1400 | 8.75 |
| NC2919V  | 95  | 130 | 22 | 1.1 | 1   | 108  | 180 | --    | --     | 107   | 117   | --   | 1000 | 2200 | 0.94 |
| NCF2919V | 95  | 130 | 22 | 1.1 | 1   | 108  | 180 | 120.4 | --     | 107   | 117   | 0.75 | 1000 | 2200 | 0.86 |
| NC3019V  | 95  | 145 | 37 | 1.5 | 1   | 230  | 360 | --    | --     | 111   | 129   | 2    | 950  | 2000 | 2.28 |
| NCF3019V | 95  | 145 | 37 | 1.5 | 1   | 230  | 360 | 135.1 | --     | 111   | 129   | 4.5  | 950  | 2000 | 2.15 |
| NCF2219V | 95  | 170 | 43 | 2.1 | 2.1 | 340  | 435 | 155.5 | --     | 122   | 147   | 2.5  | --   | --   | 4.17 |
| NC2920V  | 100 | 140 | 24 | 1.1 | 1   | 132  | 220 | --    | --     | 114   | 124   | --   | 1000 | 2200 | 1.25 |
| NCF2920V | 100 | 140 | 24 | 1.1 | 1   | 132  | 220 | 129   | --     | 114   | 124   | 0.75 | 1000 | 2200 | 1.15 |
| NC3020V  | 100 | 150 | 37 | 1.5 | 1   | 242  | 375 | --    | --     | 116   | 134   | --   | 950  | 2000 | 2.29 |

# 单列满装圆柱滚子轴承

|          |     |     |     |     |     |      |      |       |        |       |       |      |     |      |       |
|----------|-----|-----|-----|-----|-----|------|------|-------|--------|-------|-------|------|-----|------|-------|
| NCF3020V | 100 | 150 | 37  | 1.5 | 1   | 242  | 375  | 139.9 | --     | 116   | 134   | 2    | 950 | 2000 | 2.2   |
| NCF2220V | 100 | 180 | 46  | 2.1 | 2.1 | 395  | 520  | 163   | --     | 127.5 | 154   | 2.5  | --  | --   | 5.13  |
| NJ2320VH | 100 | 215 | 73  | 3   | --  | 704  | 1030 | --    | 122.8  | 136   | 176   | 4.5  | 600 | 1200 | 13    |
| NC2922V  | 110 | 150 | 24  | 1.1 | 1   | 140  | 243  | --    | --     | 126   | 137   | --   | 900 | 1900 | 1.35  |
| NCF2922V | 110 | 150 | 24  | 1.1 | 1   | 140  | 243  | 141.3 | --     | 126   | 137   | 0.75 | 900 | 1900 | 1.25  |
| NC3022V  | 110 | 170 | 45  | 2   | 1   | 325  | 510  | --    | --     | 129   | 150   | --   | 850 | 1800 | 3.79  |
| NCF3022V | 110 | 170 | 45  | 2   | 1   | 325  | 510  | 157   | --     | 129   | 150   | 3    | 850 | 1800 | 3.65  |
| NCF2222V | 110 | 200 | 53  | 2.1 | 2.1 | 455  | 590  | 177   | --     | 137   | 167   | 4    | --  | --   | 7.24  |
| NJ2322VH | 110 | 240 | 80  | 3   | --  | 826  | 1040 | --    | 134.3  | 151   | 198   | 5    | 560 | 1100 | 17.8  |
| NC2924V  | 120 | 165 | 27  | 1.1 | 1   | 172  | 287  | --    | --     | 136   | 149   | --   | 850 | 1800 | 1.88  |
| NCF2924V | 120 | 165 | 27  | 1.1 | 1   | 172  | 287  | 154.3 | --     | 136   | 149   | 0.75 | 850 | 1800 | 1.7   |
| NC3024V  | 120 | 180 | 46  | 2   | 1   | 640  | 550  | --    | --     | 139   | 160.5 | --   | 800 | 1700 | 4.1   |
| NCF3024V | 120 | 180 | 46  | 2   | 1   | 340  | 550  | 167.9 | --     | 139   | 160.5 | 3.5  | 800 | 1700 | 3.95  |
| NCF2224V | 120 | 215 | 58  | 2.1 | 2.1 | 540  | 730  | 192.5 | --     | 150.5 | 182   | 4    | --  | --   | 9.08  |
| NJ2324VH | 120 | 260 | 86  | 3   | --  | 920  | 1300 | --    | 147.4  | 164   | 211   | 5.5  | 530 | 1000 | 22.3  |
| NC2926V  | 130 | 180 | 30  | 1.5 | 1.1 | 205  | 350  | --    | --     | 147   | 161   | --   | 750 | 1600 | 2.5   |
| NCF2926V | 130 | 180 | 30  | 1.5 | 1.1 | 205  | 350  | 167.1 | --     | 147   | 161   | 0.75 | 750 | 1600 | 2.3   |
| NC3026V  | 130 | 200 | 52  | 2   | 1   | 415  | 620  | --    | --     | 148.6 | 175   | --   | 700 | 1500 | 6     |
| NCF3026V | 130 | 200 | 52  | 2   | 1   | 415  | 620  | 186.5 | --     | 148.6 | 175   | 3.5  | 700 | 1500 | 5.8   |
| NCF2226V | 130 | 230 | 64  | 3   | 3   | 630  | 860  | 207   | --     | 162.5 | 196   | 5    | --  | --   | 11.25 |
| NJ2326VH | 130 | 280 | 93  | 4   | --  | 1080 | 1660 | --    | 157.95 | 174.1 | 229.6 | 6    | 500 | 950  | 28    |
| NC2928V  | 140 | 190 | 30  | 1.5 | 1.1 | 220  | 375  | --    | --     | 159   | 173   | --   | 700 | 1500 | 2.59  |
| NCF2928V | 140 | 190 | 30  | 1.5 | 1.1 | 220  | 375  | 180   | --     | 159   | 173   | 0.75 | 700 | 1500 | 2.4   |
| NC3028V  | 140 | 210 | 53  | 2   | 1   | 440  | 680  | --    | --     | 162.7 | 189.1 | --   | 670 | 1400 | 6.21  |
| NCF3028V | 140 | 210 | 53  | 2   | 1   | 440  | 680  | 198.2 | --     | 162.7 | 189.1 | 3.5  | 670 | 1400 | 6.1   |
| NCF2228V | 140 | 250 | 68  | 3   | 3   | 720  | 1020 | 222   | --     | 174   | 210   | 5    | --  | --   | 14.47 |
| NJ2328VH | 140 | 300 | 102 | 4   | --  | 1250 | 1910 | --    | 168.5  | 184.7 | 240.5 | 6.5  | 450 | 850  | 35.5  |
| NC1830V  | 150 | 190 | 20  | 1.1 | 1   | 108  | 185  | --    | --     | 163   | 175   | 1.5  | 700 | 1500 | 1.54  |
| NCF1830V | 150 | 190 | 20  | 1.1 | 1   | 108  | 185  | 159.5 | --     | 163   | 175   | 1.5  | 700 | 1500 | 1.3   |
| NC2930V  | 150 | 210 | 36  | 2   | 1.1 | 286  | 497  | --    | --     | 171   | 188   | --   | 670 | 1400 | 4     |
| NCF2930V | 150 | 210 | 36  | 2   | 1.1 | 286  | 497  | 195.5 | --     | 171   | 188   | 0.8  | 670 | 1400 | 3.85  |
| NC3030V  | 150 | 225 | 56  | 2.1 | 1.1 | 530  | 880  | --    | --     | 174   | 203   | --   | 630 | 1300 | 7.72  |
| NCF3030V | 150 | 225 | 56  | 2.1 | 1.1 | 530  | 880  | 211.7 | --     | 174   | 203   | 3.5  | 630 | 1300 | 7.5   |
| NCF2230V | 150 | 270 | 73  | 3   | 3   | 531  | 1180 | 237   | --     | 185.5 | 254   | 6    | --  | --   | 18.43 |
| NJ2330VH | 150 | 320 | 108 | 4   | --  | 1450 | 2240 | --    | 182.5  | 203   | 261   | 6.5  | 430 | 800  | 42.5  |
| NC1832V  | 160 | 200 | 20  | 1.1 | 1.1 | 112  | 199  | --    | --     | 173   | 185   | 1.5  | 670 | 1400 | 1.6   |
| NCF1832V | 160 | 200 | 20  | 1.1 | 1.1 | 112  | 199  | 169   | --     | 173   | 185   | 1.5  | 670 | 1400 | 1.45  |
| NC2932V  | 160 | 220 | 36  | 2   | 1.1 | 297  | 524  | --    | --     | 181   | 198   | --   | 630 | 1300 | 4     |

# 单列满装圆柱滚子轴承

|          |     |     |     |     |     |      |       |        |        |       |       |     |     |      |       |
|----------|-----|-----|-----|-----|-----|------|-------|--------|--------|-------|-------|-----|-----|------|-------|
| NCF2932V | 160 | 220 | 36  | 2   | 1.1 | 297  | 524   | 205.4  | --     | 181   | 198   | 0.8 | 630 | 1300 | 4.05  |
| NC3023V  | 160 | 240 | 60  | 2.1 | 1.1 | 580  | 970   | --     | --     | 184.8 | 214.8 | --  | 600 | 1100 | 9.26  |
| NCF3023V | 160 | 240 | 60  | 2.1 | 1.1 | 580  | 970   | 225.1  | --     | 184.8 | 214.8 | 4   | 600 | 1100 | 9.1   |
| NCF2232V | 160 | 290 | 80  | 3   | 3   | 1030 | 1490  | 266.5  | --     | 208.5 | 252   | 6   | --  | --   | 23    |
| NJ2332VH | 160 | 340 | 114 | 4   | --  | 1630 | 2550  | --     | 196.55 | 216.7 | 286   | 7   | 400 | 750  | 48.8  |
| NC1834V  | 170 | 215 | 22  | 1.1 | 1.1 | 142  | 245   | --     | --     | 185   | 200   | 1.5 | 630 | 1300 | 2     |
| NCF1834V | 170 | 215 | 22  | 1.1 | 1.1 | 142  | 245   | 204.5  | --     | 185   | 200   | 1.5 | 630 | 1300 | 1.85  |
| NC2934V  | 170 | 230 | 36  | 2   | 1.1 | 308  | 552   | --     | --     | 192   | 208   | --  | 600 | 1200 | 4.5   |
| NCF2934V | 170 | 230 | 36  | 2   | 1.1 | 308  | 552   | 216    | --     | 192   | 208   | 0.8 | 600 | 1200 | 4.25  |
| NC3034V  | 170 | 260 | 67  | 2.1 | 1.1 | 728  | 1230  | --     | --     | 198   | 232   | --  | 560 | 1000 | 13.7  |
| NCF3034V | 170 | 260 | 67  | 2.1 | 1.1 | 728  | 1230  | 243.2  | --     | 198   | 232   | 4   | 560 | 1000 | 12.5  |
| NCF2234V | 170 | 310 | 86  | 3   | 3   | 1150 | 1680  | 281    | --     | 220.5 | 266   | 7   | --  | --   | 28.65 |
| NJ2334VH | 170 | 360 | 120 | 3   | --  | 1760 | 2400  | --     | 203.56 | 224.5 | 296.4 | 7   | 450 | 800  | 59.2  |
| NC1836V  | 180 | 225 | 22  | 1.1 | 1.1 | 147  | 275   | --     | --     | 196   | 211   | 1.5 | 600 | 1200 | 2.2   |
| NCF1836V | 180 | 225 | 22  | 1.1 | 1.1 | 147  | 275   | 215.2  | --     | 196   | 211   | 1.5 | 600 | 1200 | 1.95  |
| NC2936V  | 180 | 250 | 42  | 2   | 1.1 | 391  | 690   | --     | --     | 203   | 223   | --  | 560 | 1100 | 6.4   |
| NCF2936V | 180 | 250 | 42  | 2   | 1.1 | 391  | 690   | 232    | --     | 203   | 223   | 1   | 560 | 1100 | 6.25  |
| NC3036V  | 180 | 280 | 74  | 2.1 | 2.1 | 820  | 1400  | --     | --     | 212   | 249   | --  | 560 | 1100 | 17.1  |
| NCF3036V | 180 | 280 | 74  | 2.1 | 2.1 | 820  | 1400  | 260.5  | --     | 212   | 249   | 5   | 560 | 1100 | 16.5  |
| NCF2236V | 180 | 320 | 86  | 4   | 4   | 1190 | 1780  | 293    | --     | 232.5 | 278   | 7   | --  | --   | 29.8  |
| NJ2336VH | 180 | 380 | 126 | 3   | --  | 1900 | 12700 | --     | 221.74 | 242.6 | 314.6 | 9   | 400 | 700  | 69.6  |
| NC1838V  | 190 | 240 | 24  | 1.5 | 1.5 | 172  | 320   | --     | --     | 208   | 224   | 1.8 | 560 | 1100 | 2.7   |
| NCF1838V | 190 | 240 | 24  | 1.5 | 1.5 | 172  | 320   | 229    | --     | 208   | 224   | 1.8 | 560 | 1100 | 2.45  |
| NC2938V  | 190 | 260 | 42  | 2   | 1.1 | 440  | 782   | --     | --     | 212   | 236   | --  | 560 | 1100 | 6.8   |
| NCF2938V | 190 | 260 | 42  | 2   | 1.1 | 440  | 782   | 244    | --     | 212   | 236   | 1   | 560 | 1100 | 6.55  |
| NC3038V  | 190 | 290 | 75  | 2.1 | 2.1 | 850  | 1450  | --     | --     | 222   | 258   | --  | 530 | 1000 | 17.9  |
| NCF3038V | 190 | 290 | 75  | 2.1 | 2.1 | 800  | 1290  | 270    | --     | 222   | 258   | 6   | 530 | 1000 | 17    |
| NCF2238V | 190 | 340 | 92  | 4   | 4   | 1310 | 1920  | 310.5  | --     | 243.5 | 294   | 9   | --  | --   | 35.65 |
| NJ2338VH | 190 | 400 | 132 | 4   | --  | 2080 | 2900  | --     | 224.6  | 247.6 | 327   | 7   | 400 | 700  | 80    |
| NC1840V  | 200 | 250 | 24  | 1.5 | 1.5 | 176  | 335   | --     | --     | 216   | 233   | 1.8 | 560 | 1100 | 3     |
| NCF1840V | 200 | 250 | 24  | 1.5 | 1.5 | 176  | 335   | 237.5  | --     | 216   | 233   | 1.8 | 560 | 1100 | 2.6   |
| NC2940V  | 200 | 280 | 48  | 2.1 | 1.5 | 528  | 938   | --     | --     | 227   | 253   | --  | 530 | 1000 | 9.5   |
| NCF2940V | 200 | 280 | 48  | 2.1 | 1.5 | 528  | 938   | 262    | --     | 227   | 253   | 3   | 530 | 1000 | 9.15  |
| NC3040V  | 200 | 310 | 82  | 2.1 | 2.1 | 990  | 1750  | --     | --     | 237   | 276   | --  | 450 | 800  | 23    |
| NCF3040V | 200 | 310 | 82  | 2.1 | 2.1 | 990  | 1750  | 287.75 | --     | 237   | 276   | 6.5 | 450 | 800  | 22.5  |
| NCF2240V | 200 | 360 | 98  | 4   | 4   | 1420 | 2040  | 318.5  |        | 246.5 | 300.5 | 9   | --  | --   | 43.12 |
| NC1844V  | 220 | 270 | 24  | 1.5 | 1.5 | 183  | 350   | --     | --     | 237   | 253   | 1.8 | 530 | 1000 | 3.35  |
| NCF1844V | 220 | 270 | 24  | 1.5 | 1.5 | 183  | 350   | 258    | --     | 237   | 253   | 1.8 | 530 | 1000 | 2.85  |

# 单列满装圆柱滚子轴承

|          |     |     |     |     |     |      |      |       |    |       |       |     |     |     |      |
|----------|-----|-----|-----|-----|-----|------|------|-------|----|-------|-------|-----|-----|-----|------|
| NC2944V  | 220 | 300 | 48  | 2.1 | 1.5 | 550  | 1030 | --    | -- | 248   | 274   | --  | 480 | 900 | 10.9 |
| NCF2944V | 220 | 300 | 48  | 2.1 | 1.5 | 550  | 1030 | 283   | -- | 248   | 274   | 2.5 | 480 | 900 | 9.9  |
| NC3044V  | 220 | 340 | 90  | 3   | 3   | 1190 | 2100 | --    | -- | 254.7 | 297.5 | --  | 430 | 850 | 30.5 |
| NCF3044V | 220 | 340 | 90  | 3   | 3   | 1190 | 2100 | 321.7 | -- | 254.7 | 297.5 | 7   | 430 | 850 | 29.5 |
| NC1848V  | 240 | 300 | 28  | 2   | 2   | 260  | 510  | --    | -- | 261   | 281   | 1.8 | 480 | 900 | 5.3  |
| NCF1848V | 240 | 300 | 28  | 2   | 2   | 260  | 510  | 287   | -- | 261   | 281   | 1.8 | 480 | 900 | 4.4  |
| NC2948V  | 240 | 320 | 48  | 2.1 | 1.5 | 583  | 1120 | --    | -- | 261   | 296   | --  | 450 | 850 | 12   |
| NCF2948V | 240 | 320 | 48  | 2.1 | 1.5 | 583  | 1120 | 303   | -- | 261   | 296   | 2.5 | 450 | 850 | 11   |
| NC3048V  | 240 | 360 | 92  | 3   | 3   | 1250 | 2240 | --    | -- | 278   | 322   | --  | 430 | 800 | 33   |
| NCF3048V | 240 | 360 | 92  | 3   | 3   | 1250 | 2240 | 335.6 | -- | 278   | 322   | 7   | 430 | 800 | 32   |
| NC1852V  | 260 | 320 | 28  |     |     | 270  | 550  | --    | -- | 281   | 301   | 1.8 | 430 | 800 | 5.55 |
| NCF1852V | 260 | 320 | 28  | 2   | 2   | 270  | 550  | 307.2 | -- | 281   | 301   | 1.8 | 430 | 800 | 4.75 |
| NC2952V  | 260 | 360 | 60  | 2.1 | 1.5 | 737  | 1410 | --    | -- | 294   | 321   | --  | 400 | 750 | 19.3 |
| NCF2952V | 260 | 360 | 60  | 2.1 | 1.5 | 737  | 1410 | 333.7 | -- | 294   | 321   | 5   | 400 | 750 | 18.5 |
| NC3052V  | 260 | 400 | 104 | 4   | 4   | 1600 | 2920 | --    | -- | 304.1 | 358.1 | --  | 380 | 700 | 47.5 |
| NCF3052V | 260 | 400 | 104 | 4   | 4   | 1600 | 2920 | 373.5 | -- | 304.1 | 358.1 | 8   | 380 | 700 | 46.5 |
| NC1856V  | 280 | 350 | 33  | 2   | 2   | 330  | 650  | --    | -- | 305   | 327   | 2.5 | 400 | 750 | 8    |
| NCF1856V | 280 | 350 | 33  | 2   | 2   | 330  | 650  | 334   | -- | 305   | 327   | 2.5 | 400 | 750 | 7.1  |
| NC2956V  | 280 | 380 | 60  | 2.1 | 1.5 | 897  | 1710 | --    | -- | 319   | 346   | --  | 380 | 700 | 21.1 |
| NCF2956V | 280 | 380 | 60  | 2.1 | 1.5 | 897  | 1710 | 362.7 | -- | 319   | 346   | 4   | 380 | 700 | 20   |
| NC3056V  | 280 | 420 | 106 | 4   | 4   | 1650 | 3100 | --    | -- | 324   | 375   | --  | 320 | 560 | 52.5 |
| NCF3056V | 280 | 420 | 106 | 4   | 4   | 1650 | 3100 | 391   | -- | 324   | 375   | 9   | 320 | 560 | 50   |
| NC1860V  | 300 | 380 | 38  | 2.1 | 2.1 | 418  | 850  | --    | -- | 329   | 355   | 3   | 360 | 670 | 11.5 |
| NCF1860V | 300 | 380 | 38  | 2.1 | 2.1 | 418  | 850  | 363   | -- | 329   | 355   | 3   | 360 | 670 | 10   |
| NC2960V  | 300 | 420 | 72  | 3   | 3   | 1120 | 2170 | --    | -- | 342   | 375   | --  | 340 | 630 | 32.3 |
| NCF2960V | 300 | 420 | 72  | 3   | 3   | 1120 | 2170 | 390.5 | -- | 342   | 375   | 5   | 340 | 630 | 31.5 |
| NCF3060V | 300 | 460 | 118 | 4   | 4   | 1600 | 3250 | 433   | -- | 355   | 413   | 14  | --  | --  | 69   |
| NC1864V  | 320 | 400 | 38  | 2.1 | 2.1 | 440  | 852  | --    | -- | 349   | 375   | 3   | 340 | 630 | 11.3 |
| NCF1864V | 320 | 400 | 38  | 2.1 | 2.1 | 440  | 852  | 383   | -- | 349   | 375   | 3   | 340 | 630 | 10.5 |
| NC2964V  | 320 | 440 | 72  | 3   | 3   | 1140 | 2300 | --    | -- | 363   | 395   | --  | 320 | 600 | 34   |
| NCF2964V | 320 | 440 | 72  | 3   | 3   | 1140 | 2300 | 411   | -- | 363   | 395   | 5   | 320 | 600 | 33   |
| NCF3064V | 320 | 480 | 121 | 4   | 4   | 1980 | 3450 | 449   | -- | 368   | 434   | 14  | --  | --  | 74.5 |
| NC1868V  | 340 | 420 | 38  | 2.1 | 2.1 | 446  | 900  | --    | -- | 369   | 395   | 3   | 320 | 600 | 12.8 |
| NCF1868V | 340 | 420 | 38  | 2.1 | 2.1 | 446  | 900  | 403   | -- | 369   | 395   | 3   | 320 | 600 | 11   |
| NC2968V  | 340 | 460 | 72  | 3   | 3   | 1190 | 2430 | --    | -- | 383   | 415   | --  | 300 | 560 | 36   |
| NCF2968V | 340 | 460 | 72  | 3   | 3   | 1190 | 2430 | 431   | -- | 383   | 415   | 5   | 300 | 560 | 35   |
| NCF3068V | 340 | 520 | 133 | 5   | 5   | 2380 | 4150 | 485   | -- | 395   | 468   | 14  | --  | --  | 100  |
| NC1872V  | 360 | 440 | 38  | 2.1 | 2.1 | 450  | 950  | --    | -- | 389   | 415   | 3   | 300 | 560 | 12.4 |

# 单列满装圆柱滚子轴承

|            |     |     |     |     |     |      |      |       |    |     |     |     |     |     |      |
|------------|-----|-----|-----|-----|-----|------|------|-------|----|-----|-----|-----|-----|-----|------|
| NCF1872V   | 360 | 440 | 38  | 2.1 | 2.1 | 452  | 950  | 423.2 | -- | 389 | 415 | 3   | 300 | 560 | 12   |
| NC2972V    | 360 | 480 | 72  | 3   | 3   | 1230 | 2580 | --    | -- | 403 | 436 | --  | 280 | 530 | 36.8 |
| NCF2972V   | 360 | 480 | 72  | 3   | 3   | 1230 | 2580 | 451.5 | -- | 403 | 436 | 5   | 280 | 530 | 36.5 |
| NCF3072V   | 360 | 540 | 134 | 5   | 5   | 2420 | 4300 | 485   | -- | 412 | 468 | 14  | --  | --  | 105  |
| NC1876V    | 380 | 480 | 46  | 2.1 | 2.1 | 627  | 1230 | --    | -- | 416 | 448 | 305 | 280 | 530 | 19.9 |
| NCF1876V   | 380 | 480 | 46  | 2.1 | 2.1 | 627  | 1230 | 458   | -- | 416 | 448 | 305 | 280 | 530 | 19.5 |
| NC2976V    | 380 | 520 | 82  | 4   | 4   | 1570 | 3000 | --    | -- | 427 | 473 | --  | 260 | 500 | 53.5 |
| NCF2976V   | 380 | 520 | 82  | 4   | 4   | 1570 | 3000 | 488   | -- | 427 | 473 | 5   | 260 | 500 | 52.5 |
| NCF3076V   | 380 | 560 | 135 | 5   | 5   | 2510 | 4550 | 521   | -- | 431 | 504 | 14  | --  | --  | 110  |
| NC1880V    | 400 | 500 | 46  | 2.1 | 2.1 | 627  | 1280 | --    | -- | 433 | 465 | 3.5 | 260 | 500 | 21.2 |
| NCF1880V   | 400 | 500 | 46  | 2.1 | 2.1 | 627  | 1280 | 475   | -- | 433 | 465 | 3.5 | 260 | 500 | 20.5 |
| NC2980V    | 400 | 540 | 82  | 4   | 4   | 1650 | 3420 | --    | -- | 450 | 496 | --  | 240 | 480 | 55   |
| NCF2980V   | 400 | 540 | 82  | 4   | 4   | 1650 | 3420 | 511   | -- | 450 | 496 | 5   | 240 | 480 | 54.5 |
| NC3080V    | 400 | 600 | 148 | 5   | 5   | 2970 | 5500 | 558   | -- | 460 | 540 | 14  | --  | --  | 145  |
| NC1884V    | 420 | 520 | 46  | 2.1 | 2.1 | 660  | 1340 | --    | -- | 457 | 489 | 3.5 | 240 | 480 | 21.6 |
| NCF1884V   | 420 | 520 | 46  | 2.1 | 2.1 | 660  | 1340 | 499   | -- | 457 | 489 | 3.5 | 240 | 480 | 21   |
| NC2984V    | 420 | 560 | 82  | 4   | 4   | 1650 | 3500 | --    | -- | 463 | 509 | --  | 220 | 450 | 57.7 |
| NCF2984V   | 420 | 560 | 82  | 4   | 4   | 1650 | 3500 | 524   | -- | 463 | 509 | 5   | 220 | 450 | 57   |
| NCF3084V   | 420 | 620 | 150 | 5   | 5   | 3030 | 5700 | 577   | -- | 480 | 559 | 15  | --  | --  | 150  |
| NC1888V    | 440 | 540 | 46  | 2.1 | 2.1 | 670  | 1405 | --    | -- | 474 | 506 | 3.5 | 220 | 450 | 22.6 |
| NCF1888V   | 440 | 540 | 46  | 2.1 | 2.1 | 670  | 1405 | 516   | -- | 474 | 506 | 3.5 | 220 | 450 | 22   |
| NCF2888V   | 440 | 540 | 450 | 5   | 5   | 968  | 2360 | 516   | -- | 474 | 508 | 15  | --  | --  | 29   |
| NC2988V    | 440 | 600 | 95  | 4   | 4   | 2010 | 4270 | --    | -- | 502 | 545 | --  | 200 | 430 | 81.1 |
| NCF2988V   | 440 | 600 | 95  | 4   | 4   | 2010 | 4270 | 565.5 | -- | 502 | 545 | 6   | 200 | 430 | 80.5 |
| NCF3088V   | 440 | 650 | 157 | 6   | 6   | 3580 | 6550 | 611   | -- | 500 | 590 | 16  | --  | --  | 175  |
| NC1892V    | 460 | 580 | 56  | 2.1 | 2.1 | 913  | 1850 | --    | -- | 501 | 541 | 5   | 200 | 430 | 34.8 |
| NCF1892V   | 460 | 580 | 56  | 2.1 | 2.1 | 913  | 1850 | 553   | -- | 501 | 541 | 5   | 200 | 430 | 34   |
| NCF2892V   | 460 | 580 | 72  | 3   | 3   | 1300 | 3050 | 553   | -- | 501 | 543 | 5   | --  | --  | 44   |
| NC2992V    | 460 | 620 | 95  | 3   | 3   | 2050 | 4420 | --    | -- | 516 | 558 | --  | 190 | 400 | 83.9 |
| NCF2992V   | 460 | 620 | 95  | 3   | 3   | 2050 | 4420 | 579   | -- | 516 | 558 | 6   | 190 | 400 | 83.5 |
| NCF3092V   | 460 | 680 | 163 | 6   | 6   | 3690 | 6950 | 635   | -- | 522 | 611 | 16  | --  | --  | 195  |
| NC1896V    | 480 | 600 | 56  | 4   | 4   | 935  | 1920 | 573.5 | -- | 522 | 561 | 5   | 190 | 400 | 35.5 |
| NCF2986V   | 480 | 600 | 72  | 3   | 3   | 1320 | 3150 | 573.5 | -- | 520 | 562 | 5   | --  | --  | 45   |
| NCF2996V   | 480 | 650 | 100 | 4   | 4   | 2290 | 4950 | 606   | -- | 538 | 584 | --  | 180 | 380 | 98   |
| NCF3096V   | 480 | 700 | 165 | 6   | 6   | 3740 | 7200 | 654   | -- | 846 | 628 | 16  | --  | --  | 205  |
| NC18/500V  | 500 | 620 | 56  | 3   | 3   | 952  | 2120 | 594   | -- | 842 | 582 | 5   | 180 | 380 | 36.5 |
| NCF28/500V | 500 | 620 | 72  | 3   | 3   | 1340 | 3350 | 594   | -- | 841 | 582 | 2.4 | --  | --  | 48   |
| NCF29/500V | 500 | 670 | 100 | 5   | 5   | 2380 | 5240 | 634.5 | -- | 567 | 612 | 7   | 170 | 360 | 100  |

# 单列满装圆柱滚子轴承

|             |      |      |     |     |     |      |       |       |    |      |      |     |     |     |      |
|-------------|------|------|-----|-----|-----|------|-------|-------|----|------|------|-----|-----|-----|------|
| NCF30/500V  | 500  | 720  | 167 | 6   | 6   | 3800 | 7500  | 676   | -- | 565  | 650  | 16  | --  | --  | 215  |
| NC18/530V   | 530  | 650  | 56  | 3   | 3   | 990  | 2110  | 624.5 | -- | 573  | 612  | 5   | 170 | 360 | 38.5 |
| NCF28/530V  | 530  | 650  | 72  | 3   | 3   | 1400 | 3450  | 524.5 | -- | 572  | 614  | 5   | --  | --  | 49.5 |
| NCF29/530V  | 530  | 710  | 106 | 5   | 5   | 2640 | 6100  | 676   | -- | 598  | 661  | 7   | --  | --  | 120  |
| NCF30/530V  | 530  | 780  | 185 | 6   | 6   | 5230 | 10600 | 732.3 | -- | 610  | 702  | 16  | --  | --  | 300  |
| NC18/560V   | 560  | 680  | 56  | 3   | 3   | 1020 | 2230  | 655   | -- | 603  | 643  | 5   | 160 | 340 | 40.5 |
| NCF28/560V  | 560  | 680  | 72  | 3   | 3   | 1420 | 3650  | 655   | -- | 606  | 637  | 4.3 | --  | --  | 54   |
| NCF29/560V  | 560  | 750  | 112 | 5   | 5   | 3080 | 6700  | 718   | -- | 628  | 700  | 7   | --  | --  | 140  |
| NCF30/560V  | 560  | 820  | 195 | 6   | 6   | 5830 | 11800 | 770   | -- | 642  | 738  | 16  | --  | --  | 345  |
| NC18/600V   | 600  | 730  | 60  | 3   | 3   | 1050 | 2350  | 696   | -- | 644  | 684  | 7   | 150 | 320 | 51.5 |
| NC28/600V   | 600  | 730  | 78  | 3   | 3   | 1570 | 4300  | 696   | -- | 644  | 685  | 6   | --  | --  | 67.5 |
| NC29/600V   | 600  | 800  | 118 | 5   | 5   | 3190 | 7100  | 754   | -- | 662  | 726  | 7   | --  | --  | 170  |
| NCF18/630V  | 630  | 780  | 69  | 4   | 4   | 1250 | 2800  | 739   | -- | 681  | 725  | 8   | 140 | 300 | 72.5 |
| NCF28/630V  | 630  | 780  | 88  | 4   | 4   | 1870 | 5000  | 739   | -- | 680  | 728  | 8   | --  | --  | 92.5 |
| NCF29/630V  | 630  | 850  | 128 | 6   | 6   | 3740 | 8650  | 807   | -- | 709  | 788  | 8   | --  | --  | 205  |
| NC18/670V   | 670  | 820  | 69  | 4   | 4   | 1300 | 3000  | 783   | -- | 725  | 769  | 8   | 130 | 280 | 76.5 |
| NCF28/670V  | 670  | 820  | 88  | 4   | 4   | 1940 | 5300  | 783   | -- | 724  | 772  | 8   | --  | --  | 97.5 |
| NCF29/670V  | 670  | 900  | 136 | 6   | 6   | 3910 | 9000  | 846   | -- | 748  | 827  | 10  | --  | --  | 245  |
| NCF18/710V  | 710  | 870  | 74  | 4   | 4   | 1540 | 3550  | 831   | -- | 767  | 815  | 8   | 120 | 260 | 92.5 |
| NCF28/710V  | 710  | 870  | 95  | 4   | 4   | 2330 | 6300  | 831   | -- | 766  | 818  | 8   | --  | --  | 115  |
| NCF29/710V  | 710  | 950  | 140 | 6   | 6   | 4290 | 10000 | 896   | -- | 790  | 876  | 10  | --  | --  | 275  |
| NCF18/750V  | 750  | 920  | 78  | 5   | 5   | 1760 | 4030  | 880   | -- | 811  | 863  | 8   | 110 | 240 | 110  |
| NCF28/750V  | 750  | 920  | 100 | 5   | 5   | 2640 | 6950  | 878   | -- | 805  | 863  | 8   | --  | --  | 140  |
| NCF29/750V  | 750  | 1000 | 145 | 6   | 6   | 4460 | 10600 | 938   | -- | 832  | 918  | 11  | --  | --  | 315  |
| NCF18/800V  | 800  | 980  | 82  | 5   | 5   | 1940 | 4800  | 936   | -- | 863  | 922  | 9   | --  | --  | 130  |
| NCF28/800V  | 800  | 980  | 106 | 5   | 5   | 2750 | 7500  | 936   | -- | 863  | 922  | 10  | --  | --  | 165  |
| NCF29/800V  | 800  | 1060 | 150 | 6   | 6   | 4950 | 12200 | 1002  | -- | 891  | 981  | 11  | --  | --  | 360  |
| NCF18/850V  | 850  | 1030 | 82  | 5   | 5   | 2010 | 5100  | 985   | -- | 911  | 972  | 9   | --  | --  | 135  |
| NCF28/850V  | 850  | 1030 | 106 | 5   | 5   | 2860 | 8000  | 986   | -- | 911  | 972  | 10  | --  | --  | 175  |
| NCF29/850V  | 850  | 1120 | 155 | 6   | 6   | 5230 | 12700 | 1061  | -- | 943  | 1039 | 13  | --  | --  | 405  |
| NCF18/900V  | 900  | 1090 | 85  | 5   | 5   | 2380 | 6000  | 1044  | -- | 966  | 1029 | 9   | --  | --  | 160  |
| NCF28/900V  | 900  | 1090 | 112 | 5   | 5   | 3190 | 9150  | 1044  | -- | 966  | 1029 | 10  | --  | --  | 208  |
| NCF29/900V  | 900  | 1180 | 165 | 6   | 6   | 5940 | 14500 | 1120  | -- | 996  | 1096 | 13  | --  | --  | 472  |
| NCF18/950V  | 950  | 1150 | 90  | 5   | 5   | 2420 | 6300  | 1103  | -- | 1021 | 1087 | 10  | --  | --  | 185  |
| NCF28/950V  | 950  | 1150 | 118 | 5   | 5   | 3410 | 9800  | 1103  | -- | 1021 | 1087 | 12  | --  | --  | 240  |
| NCF29/950V  | 950  | 1250 | 175 | 7.5 | 7.5 | 6600 | 16300 | 1179  | -- | 1048 | 1154 | 14  | --  | --  | 565  |
| NCF18/1000V | 1000 | 1220 | 100 | 6   | 6   | 2920 | 7500  | 1165  | -- | 1073 | 1148 | 12  | --  | --  | 230  |
| NCF28/1000V | 1000 | 1220 | 128 | 6   | 6   | 4130 | 11600 | 1165  | -- | 1073 | 1148 | 12  | --  | --  | 310  |

### 单列满装圆柱滚子轴承

|             |      |      |     |     |     |      |       |      |    |      |      |    |    |    |     |
|-------------|------|------|-----|-----|-----|------|-------|------|----|------|------|----|----|----|-----|
| NCF29/1000V | 1000 | 1320 | 185 | 7.5 | 7.5 | 7480 | 18600 | 1252 | -- | 1113 | 1226 | 14 | -- | -- | 680 |
| NCF18/1120V | 1120 | 1360 | 106 | 6   | 6   | 3740 | 9650  | 1310 | -- | 1206 | 1290 | 12 | -- | -- | 298 |