

双列圆锥滚子轴承（单外圈双内圈）

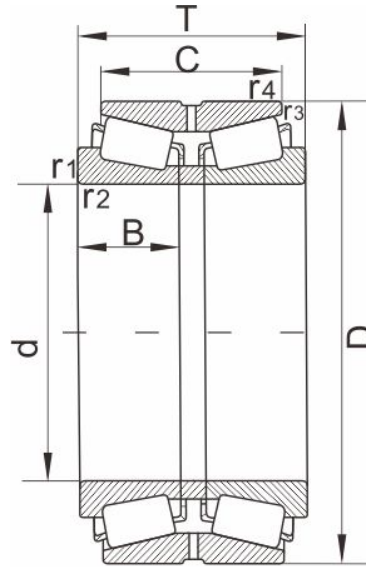


图 Design 11

型号	外形尺寸 [mm]						重量 [kg]	AFBMA	图	额定载荷		计算参数				
	d	D	T	C	r1,r2 Min	r3,r4 Min				动负荷	静负荷	e	Y1	Y2	Y0	K
331314B	82.550,3.2500	115.888	47.625	39.69	1.5	0.8	1.5	L116149/L116110DC	21	142	276	0.31	2.2	3.3	2.2	1.9
	82.550,3.2500	4.5625	1.875	1.5626	0.059	0.03										
BT2B332768	90,3.5433	135	49	39.35	1.5	0.8	2.2	--	11	198	342	0.33	2	3	2	1.76
	90,3.5433	5.315	1.9291	1.5374	0.059	0.03										
42208	100,3.9370	165	88.9	63.5	4	0.8	7.55	--	31	358	699	95	45.5	0.5	1.35	1.18
	100,3.9370	6.4961	3.5	2.5	0.157	0.03										
617335	100,3.9370	180	80	64	3	0.8	7.65	--	11	429	672	112	46.5	0.43	1.6	1.39
	100,3.9370	7.0866	3.1496	2.5197	0.118	0.03										
BT2B332767	101.600,4.0000	146.05	49.212	39.688	1.5	0.8	2.45	L521945/L521910D	11	205	368	52	18.6	0.37	1.8	1.61
	101.600,4.0000	5.75	1.9375	1.5625	0.059	0.03										
331392A	107.950,4.2500	146.05	49.212	39.688	1.5	0.8	2.25	L521949/L521910D	11	142	294	36.5	14	0.4	1.7	1.49
	107.950,4.2500	5.75	1.9375	1.5625	0.059	0.03										
6140181)	107.950,4.2500	158.75	53.978	36.688	3.5	0.8	3	37425/2/CL3/37626D	11	176	318	45	26.5	0.6	1.15	0.96
	107.950,4.2500	6.25	2.1251	1.5625	0.14	0.03										
331181	120,4.7244	180	86	69	2.5	0.8	7.1	--	11	418	828	110	50	0.46	1.5	1.27
	120,4.7244	7.0866	3.3858	2.7165	0.098	0.03										
330431A	130,5.1181	230	146	118.56	4	1.5	23.5	--	11	952	1750	250	108	0.43	1.6	1.34
	130,5.1181	9.0551	5.748	4.6677	0.157	0.59										
332160	133.350,5.2500	215.9	106.362	80.962	3.5	1.5	14.5	NA7452574851D	41	605	1210	160	76.5	0.48	1.4	1.2
	133.350,5.2500	8.5	4.1875	3.1875	0.14	0.59										
442210	140,5.5118	200	93.665	73.8	5	1	9.3	--	31	440	1010	114	37.5	0.33	2	1.74
	140,5.5118	7.874	3.6876	2.8772	0.196	0.39										
331943	146.050,5.7500	193.675	65.085	53.975	1.5	0.8	5	36690/36620D	11	303	690	78	28.5	0.37	1.8	1.59
	146.050,5.7500	7.625	2.5624	2.125	0.059	0.03										
613328A	152.400,6.0000	222.25	100.01	76.2	3.5	0.8	12	M231649/M231610D	11	561	1230	146	48	0.33	2	1.76
	152.400,6.0000	8.75	3.9374	3	0.14	0.03										
331792	165.100,6.5000	225.425	85.725	69.85	8	0.8	10	46790A/46720D	11	457	1120	120	45	0.37	1.8	1.52
	165.100,6.5000	8.875	3.375	2.75	0.31	0.03										
BT2B332585/HA2	177.800,7.0000	269.875	119.062	93.662	3.5	1.5	23.3	M238840/M238810D	11	825	1840	0.33	2	3	2	1.76

双列圆锥滚子轴承（单外圈双内圈）

	177.800,7.0000	10.625	4.6875	3.6875	0.14	0.059										
442213	180,7.0866	270	109.538	84.138	2.5	0.8	22.5	--	31	644	1530	0.48	1.4	2.1	1.4	1.22
	180,7.0866	10.6299	4.3125	3.3125	0.098	0.03										
442214	200,7.8740	290	121	88	5	1	24	--	31	825	1840	0.43	1.6	2.3	1.6	1.48
	200,7.8740	11.4173	4.7638	3.4646	0.197	0.039										
BT2B332459	200.025,7.8750	317.5	146.05	111.125	4.3	1.5	41.5	93787/93127D	11	1080	2370	0.52	1.3	1.9	1.3	1.12
	200.025,7.8750	12.5	5.75	4.375	0.17	0.059										
BT2B332584/HA2	228.600,9.0000	327.025	114.3	82.55	6.4	1.5	30	8573/8520D	11	792	2020	0.4	1.7	2.5	1.6	1.44
	228.600,9.0000	12.875	4.5	3.25	0.25	0.059										
BT2B332443	247.650,9.7500	406.4	247.65	203.2	6.4	1.5	122	HH249949/HH249910D	11	2810	6350	0.33	2	3	2	1.76
	247.650,9.7500	16	9.75	8	0.25	0.059										
331717	280,11.0236	470	250	180	6.4	0.8	135	--	11	3300	6620	0.46	1.5	2.2	1.4	1.27
	280,11.0236	18.5039	9.8425	7.0866	0.25	0.03										
BT2B332449	285.750,11.2500	380.898	139.7	107.95	3.5	1	42	LM654649/LM654610D	11	1140	3000	0.43	1.6	2.3	1.6	1.35
	285.750,11.2500	14.996	5.5	4.25	0.14	0.039										
BT2B332503/HA2	288.925,11.3750	406.4	165.1	130.175	6.4	1.5	63	M255449/M255410DC	21	1830	4340	0.33	2	3	2	1.73
	288.925,11.3750	16	6.5	5.125	0.25	0.059										
BT2B332504/HA2	300.038,11.8125	422.275	174.625	136.525	6.4	1.5	71.5	HM256849/HM256810DC	21	1900	4600	0.33	2	3	2	1.73
	300.038,11.8125	16.625	6.875	5.375	0.25	0.059										
BT2B332845/HA2	330.200,13.0000	482.6	177.8	127	3.3	1.5	100	EE526132/526191D	11	2240	4780	0.4	1.7	2.5	1.6	1.49
	330.200,13.0000	19	7	5	0.13	0.059										
331775B	333.375,13.1250	469.9	190.5	152.4	6.4	0.8	98	HM201049/HM261010DC	21	2330	5520	0.33	2	3	2	1.73
	333.375,13.1250	18.5	7.5	6	0.25	0.03										
BT2B332830	340,13.3858	460	160	128	3	1	71	--	11	1940	4690	0.31	2.2	3.3	2.2	1.86
	340,13.3858	18.1102	6.2992	5.0394	0.118	0.039										
BT2B332505/HA2	355.600,14.0000	444.5	136.525	111.125	3.5	1.5	45.8	L163419/L163110DC	21	1190	3500	0.31	2.2	3.3	2.2	1.9
	355.600,14.0000	17.5	5.375	4.375	0.14	0.059										
BT2B332506/HA2	355.600,14.0000	501.65	155.575	107.95	6.4	1.5	87	EE231400/231967D	11	1720	4050	0.44	1.5	2.3	1.5	1.33
	355.600,14.0000	19.75	6.125	4.25	0.25	0.059										
BT2B332831	360,14.1732	480	160	128	3	1	73	--	11	1900	4780	0.33	2	3	2	1.77
	360,14.1732	18.8976	6.2992	5.0394	0.118	0.039										
331606A	371.475,14.6250	501.65	155.575	107.95	6.4	1.5	76.5	EE231462/231976DC	21	1720	4050	0.44	1.5	2.3	1.5	1.33
	371.475,14.6250	19.75	6.125	4.25	0.25	0.059										
BT2B332507/HA2	381,15.0000	508	139.7	88.9	6.4	1.5	67	EE192510/192201DC	21	1280	3130	0.54	1.25	1.8	1.25	1.1
	381,15.0000	20	5.5	3.5	0.25	0.059										
331197A	384.175,15.1250	546.1	222.25	177.8	6.4	1.6	161	HM266449/HM266410D	11	3300	8100	0.33	2	3	2	1.76
	384.175,15.1250	21.5	8.75	7	0.25	0.063										
331656	415.925,16.3750	590.55	244.475	193.675	6.4	1.5	205	M268749/M268710D	21	3690	9380	0.33	2	3	2	1.76
	415.925,16.3750	23.25	9.625	7.625	0.25	0.059										
BT2B332237A/HA1	431.800,17.0000	571.5	195.088	146.05	6.4	1.5	125	LM769349/LM769310DC	21	2510	6620	0.44	1.5	2.3	1.5	1.33
	431.800,17.0000	22.5	7.5625	5.75	0.25	0.059										
BT2B332176A	447.675,17.6250	635	257.175	206.375	6.4	1.5	245	M270749/M270710DC	21	4130	10800	0.33	2	3	2	1.76
	447.675,17.6250	25	10.125	8.125	0.25	0.059										
331657	479.425,18.8750	679.45	276.225	222.25	6.4	1.5	300	M272749/M270710DC	21	4730	12300	0.33	2	3	2	1.76
	479.425,18.8750	26.75	10.875	8.75	0.25	0.059										
BT2B332797	480,18.8976	650	180	130	5	1.5	150	--	11	2750	6620	0.4	1.7	2.5	1.7	1.48
	480,18.8976	25.5906	7.0866	5.1187	0.2	0.059										
331605B	498.475,19.6250	634.873	117.8	142.875	6.4	1.5	130	EE243196/243251DC	21	2550	6990	0.35	1.9	2.9	1.9	1.7
	498.475,19.6250	24.995	7	5.625	0.25	0.059										
BT2B332605A/HA1	501.650,19.7500	711.2	282.1	231.775	6.4	1.5	343	M274119/M274110DC	21	4840	13200	0.33	2	3	2	1.76
	501.650,19.7500	28	11.5	9.125	0.25	0.059										
BT2B332761	520.700,20.5000	736.6	186.502	114.3	6.4	1.5	210	EE982051/982901DC	21	2640	6160	0.48	1.4	2.1	1.4	1.23
	520.700,20.5000	29	7.3426	4.5	0.25	0.059										

双列圆锥滚子轴承（单外圈双内圈）

BT2B332446	536.575,21.1250	761.873	311.15	247.65	6.4	1.5	430	M276449/M276410DC	21	5390	15600	0.33	2	3	2	1.76
	536.575,21.1250	29.995	12.25	9.75	0.25	0.059										
331280	558.800,22.0000	736.6	187.328	142.262	6.4	1.6	245	--	12	2200	5340	0.5	1.35	2	1.3	1.16
	558.800,22.0000	29	7.3751	5.6009	0.25	0.063										
331640A	558.800,22.0000	736.6	225.425	177.88	6.4	1.5	250	LM33749/LM377410DC	21	4020	11000	0.35	1.9	2.9	1.8	1.69
	558.800,22.0000	29	8.875	7	0.25	1.059										
BT2B332447	571.500,22.5000	812	333.375	263.525	6.4	1.5	520	M278749/M278710DC	22	5720	15600	0.33	2	3	2	1.76
	571.500,22.5000	32	13.125	10.375	0.25	0.059										
331576A	602.945,23.7380	787.4	206.375	158.75	6.4	1.5	180	EE649237/649311D	11	3520	10100	0.37	1.8	2.7	1.8	1.58
	602.945,23.7380	31	8.125	6.25	0.25	0.059										
331500	609.600,24.0000	820	206.375	158.75	6.4	1.5	292	--	11	3520	10100	0.37	1.8	2.7	1.8	1.58
	609.600,24.0000	32.2835	8.125	6.25	0.25	0.059										
BT2B332493/HA1)	635,25.0000	990.6	339.725	212.725	6.4	6.4	840	--	12	7040	15900	0.88	0.77	1.15	0.8	0.67
	635,25.0000	39	13.375	8.375	0.025	0.025										
33155411)	723.900,28.5000	914.4	187.325	139.7	3.3	1.5	250	EE755285/755361D	11	3300	9200	0.37	1.8	2.7	1.8	1.54
	723.900,28.5000	36	7.375	5.5	0.13	0.059										
BT2B332625	774.962,30.5103	1016	266.7	209.5	8	2.5	525	--	11	5830	17100	0.33	2	3	2	1.79
	774.962,30.5103	40	10.5	8.25	0.315	0.098										
BT2B332494/HA5	863.600,34.0000	1371.6	469.9	285.75	28	2	2315	--	12	13000	31800	0.88	0.77	1.15	0.8	0.67
	863.600,34.0000	54	18.5	11.25	1.1	0.079										
BT2B332780/HA5	1160,45.6693	1540	400	290	9.5	3	1900	--	12	12300	36800	0.44	1.5	2.3	1.4	1.31
	1160,45.6693	60.6299	15.748	11.4173	0.37	0.118										
BT2B332495/HA5	1320.800,52.0000	1727.2	412.75	254	28	2	2330	--	12	12300	39000	0.83	0.81	1.2	0.8	0.72
	1320.800,52.0000	68	16.25	10	1.1	0.079										
BT2B332496/HA51)	1778,70.0000	2159	393.7	266.7	12.7	3	2740	--	12	13400	49700	0.79	0.85	1.25	0.8	0.72
	1778,70.0000	85	15.5	10.5	0.5	0.118										
BT2B332497/HA4	2133.600,84.0000	2819.273	742	457.2	SP	3.5	11600	--	12	30300	101000	0.94	0.72	1.05	0.7	0.56
	2133.600,84.0000	110.995	29.2126	18		0.14										
BT2B332673/HA4	2184.400,86.0000	2527.3	304.8	165.1	16	5	2230	--	12	8800	34200	0.94	0.72	1.05	0.7	0.51
	2184.400,86.0000	99.5	12	6.5	0.63	0.197										