


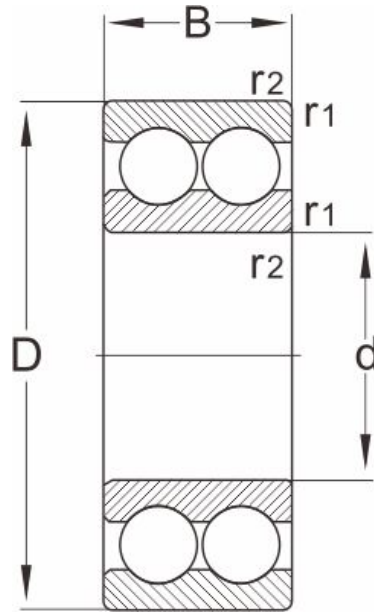

型号	尺寸mm				额定载荷(kN)		极限转速(rpm)		重量
	d	D	B	r1,r2 Min	动载荷	静载荷	脂润滑	油润滑	Kg
4200B.TV	10	30	14	0.6	9.2	5.2	18000	22000	0.049
4201B.TV	12	32	14	0.6	10.6	6.2	17000	20000	0.053
4202B.TV	15	35	14	0.6	11.9	7.5	14000	17000	0.059
4203B.TV	15	42	17	1	14.8	9.5	12000	15000	0.12
4303B.TV	17	40	16	0.6	14.8	9.5	12000	15000	0.09
4205B.TV	17	47	19	1	19.5	13.5	10000	13000	0.16
4204B.TV	20	47	18	1	17.8	12.5	10000	13000	0.14
4304B.TV	20	52	21	1.1	23.4	16	9500	12000	0.21
4205B.TV	25	52	18	1	19	14.5	9000	11000	0.16
4309B.TV	25	62	24	1.1	31.9	22.5	8500	10000	0.34
4206B.TV	30	62	20	1	26	20.5	8000	9500	0.26
4306B.TV	30	72	27	1.1	41.2	30	7000	8500	0.5
4207B.TV	35	72	23	1.1	35.1	28.5	6700	8000	0.4
4307B.TV	35	80	31	1.5	50.5	38	6300	7500	0.69
4208B.TV	40	80	23	1.1	37.5	32.5	6000	7000	0.5

双列深沟球轴承

4308B.TV	40	90	33	1.5	55.7	45	5600	6700	0.95
4209B.TV	45	85	23	1.1	39	36	5600	6700	0.54
4309B.TV	45	100	36	1.5	68.5	56	5000	6000	1.25
4210B.TV	50	90	23	1.1	40.5	40	5000	6000	0.58
4310B.TV	50	110	40	2	81.5	70	4500	5300	1.7
4211B.TV	55	100	25	1.5	45	44	4800	5600	0.8
4311B.TV	55	120	43	2	97.5	83	4300	5000	2.15
4212B.TV	60	110	28	1.5	57	55	4500	5300	1.1
4312B.TV	60	130	46	2.1	112	98	3800	4500	2.65
4213B.TV	65	120	31	1.5	67.5	67	4000	4800	1.45
4214B.TV	70	125	31	1.5	70	73.5	3600	4300	1.5
4215B.TV	75	130	31	1.5	72.5	80	3400	4000	1.6
4216B.TV	80	140	33	2	80.5	90	3200	3800	2
4217B.TV	85	150	36	2	93.6	102	3000	3600	2.55
4218B.TV	90	160	40	2	112	122	2800	3400	3.2
4220B.TV	100	180	46	2.1	140	156	2600	3200	4.7